

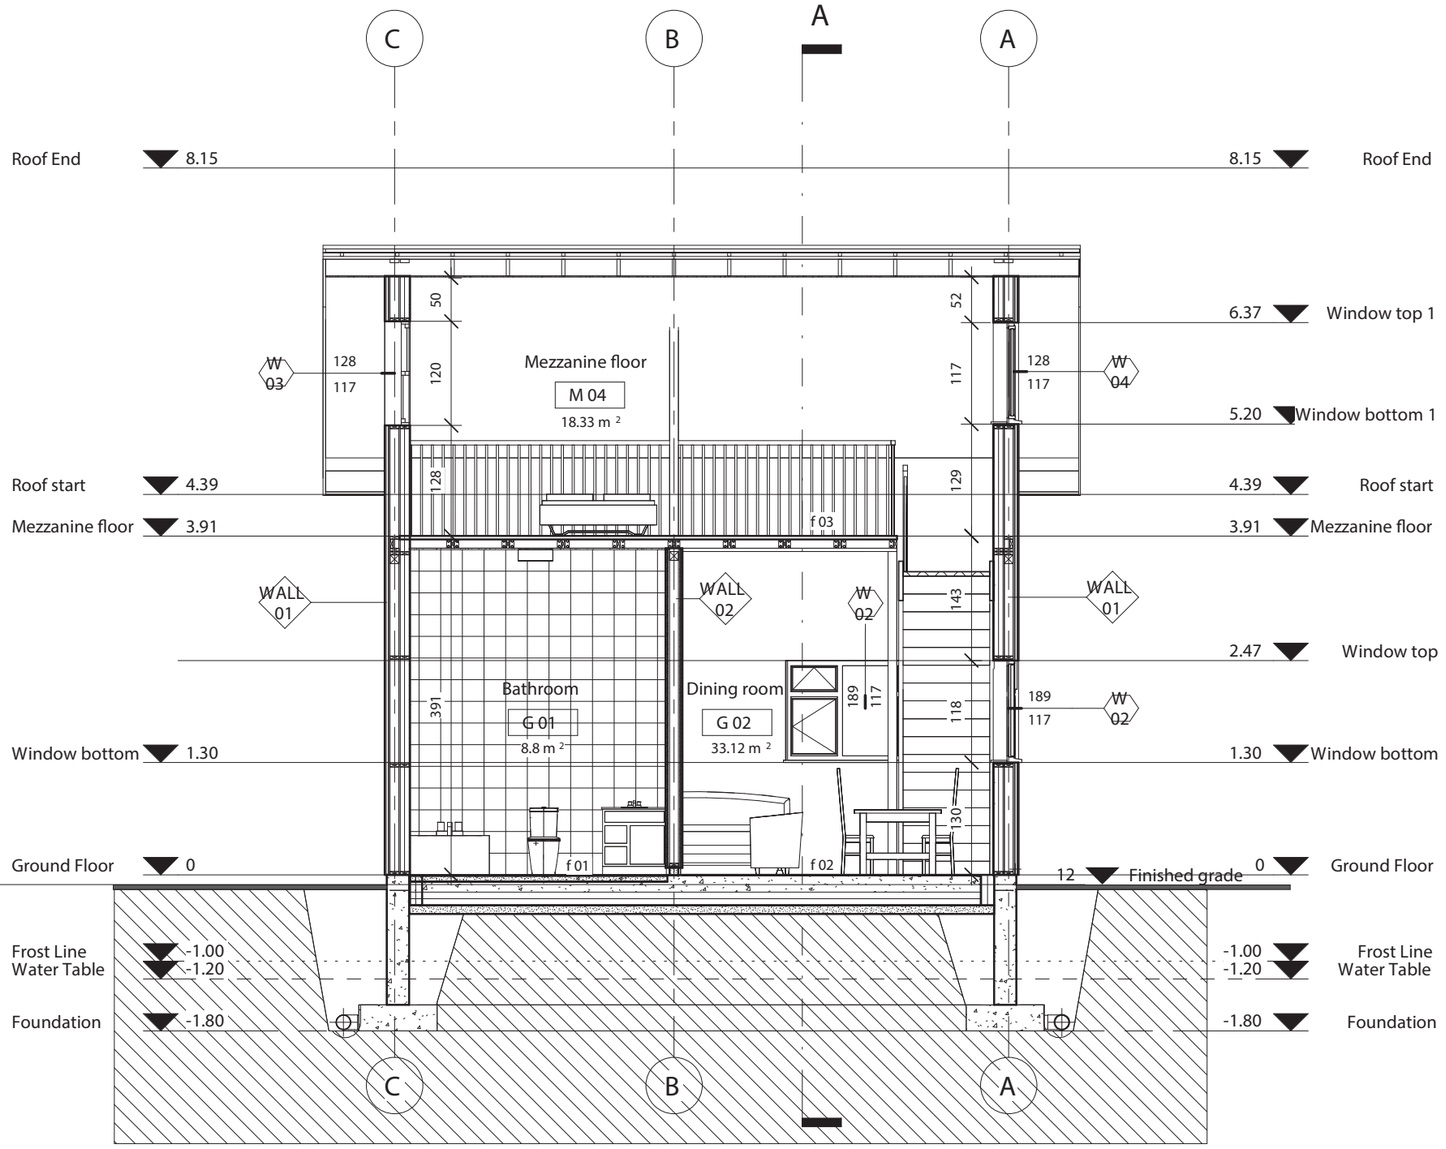


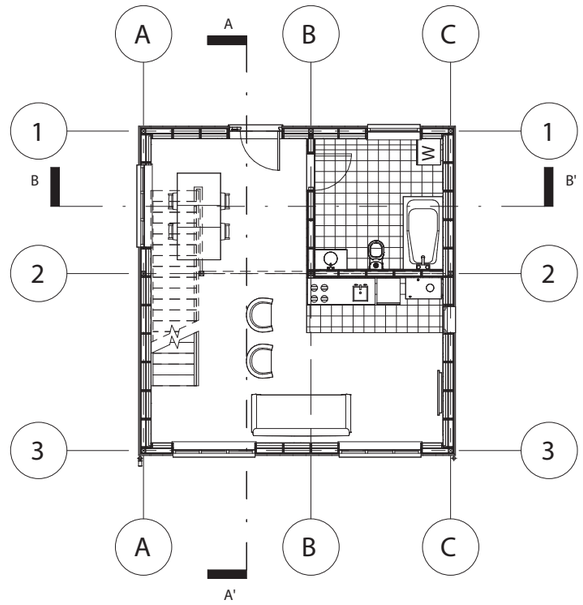

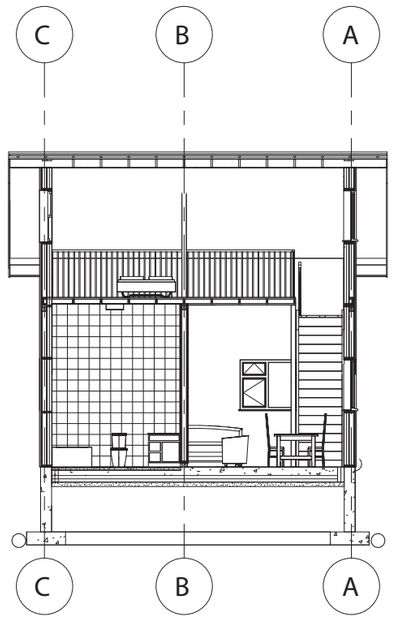

WALL 01	
Gypsum wall board	1 cm
Air	5.2 cm
Rockwool insulation	5 cm
OSB	1.5 cm
Air infiltration barrier	0.2 cm
Rockwool insulation	10 cm
OSB	1.5 cm
Breather membrane (Dupont Tyvek)	0.5 cm
Waterproofing membrane	0.1 cm
Battens	2.5 cm
Timber cladding	1.7 cm

WALL 02	
Gypsum board	1 cm
OSB Panels	1.5 cm
Rockwool	10 cm
OSB Panels	1.5 cm
Gypsum board	1 cm

f 01	
Porcelain tile	1.5 cm
Screed	5 cm
Elastic Waterproofing Material GRADASEAL WP 200	
Cast in situ concrete slab	12.5 cm

f 02	
PVC floor finishing	0.5 cm
Cast in situ concrete slab	20 cm
Damp proof membrane	0.2 cm
XPS insulation	2x7.6 cm
Waterproofing membrane	0.1 cm
Sand blinding	10 cm
Gravel	

f 03	
PVC floor finish	0.25 cm
OSB	3.8 cm

TBM = 938

N

M.E.T.U. FACULTY OF ARCHITECTURE DEPARTMENT OF ARCHITECTURE	ARCH351	BUILDING DETAIL MODELLING
	CHECKED BY:	
PORTFOLIO SUBMISSION		SCALE: 1/50
SECTION BB'		SHEET: A3
DRAWING BY: CİHAN AY - CİHAT İLKBAHAR		FINAL EXAM
		DATE: 30.01.2022